



Superior Value Superior Results

The Choice is Automatic:
Wulftec® Automatic Stretchwrappers

The Rotary Arm Series

NON-CONVEYORIZED
WRTA-100
WRTA-150
WRTA-200
CONVEYORIZED
WCRT-200



WE FEAR NO PACKAGING CHALLENGE

WE'LL KEEP YOU RUNNING AT PEAK SPEED



Wulftec® stretchwrappers are famous for their exceptional reliability, durability and safety. They are built to perform flawlessly, no matter how harsh your environment may be. Whether used as a free-standing unit or added to an existing system, your Wulftec® stretchwrapper will offer years of superior value and superior results.

Our commitment to your productivity goes well beyond the installation of your new stretchwrapper. From problem-solving to ordering replacement parts, our experienced distributors and service technicians will help you find the right solution – quickly and easily.

Why Go Automatic?

Automatic stretchwrappers are designed to maximize throughput and efficiency. They take care of everything; all you need to do is change the roll of film. If you wrap 80 or more loads in an eight-hour shift, an automatic stretchwrapper will save you significant time and money.

Benefits of a Rotary Arm

Rotary arm stretchwrappers are extremely versatile and can wrap almost anything. Since the load remains stationary, they are ideal for wrapping very light, very heavy, tall or unstable loads. They are also great in wash-down applications.

Why Compromise? Customize!

Customizing a stretchwrapper can make all the difference between boosting productivity and maximizing it. Our many affordable options make it easy for you to tailor your Wulftec® stretchwrapper to your specific application – and enjoy a level of performance other machines cannot match.

Our most popular options:

- **30" NO-THREAD® powered pre-stretch carriage:** Larger web means you'll wrap faster and use less film
- **Pop-up device:** Lifts the load so the film can go under the pallet, securing the load right to the pallet
- **Wrap height extension:** Wraps loads exceeding 80" in height
- **Dark load photoeye:** Wraps dark or shiny loads that reflect light
- **Rotation speed:** Increases speed so you'll wrap more in less time
- **Top platen:** Stabilizes light and unstable loads
- **Top sheet dispensers:** Applies a protective plastic sheet on top of the load
 - Incycle top sheet dispenser protects against water ingress
 - Inline top sheet dispenser protects against dust

THE WULFTEC ADVANTAGE

Looking for flawless performance? Wulftec offers:

- **Heavy-duty all-steel structures:** Unlike plastic, they're built to last forever
- **NO-THREAD® powered pre-stretch carriage:** Pre-stretches film by 50% to 300% for optimal film use
- **AC variable frequency drives and motors:** Ensure safe, reliable performance and minimal maintenance
- **Allen-Bradley components:** The standard in North America
- **Complete peace of mind:**
 - 3-year unlimited cycle warranty on all stretchwrappers
 - 10-year warranty on 25" sturdy ring gear bearing device
 - LIFETIME warranty on blue pre-stretch compound rollers

FOR OUR OTHER OPTIONS, VISIT WWW.WULFTEC.COM
OR CALL 1-877-WULFTEC (985-3832)

The Choice is AUTOMATIC

TECHNICAL SPECIFICATIONS

	WRTA-100/150/200	WCRT-200
PRODUCTION RATE*	• Up to 60 loads per hour	• Up to 65 loads per hour
LOAD SIZE	• Min.: 36"W x 36"L x 30"H • Max.: 52"W x 52"L x 80"H	• Min.: 36"W x 36"L x 10"H • Max.: 50"W x 50"L x 80"H
LOAD WEIGHT	• Unlimited	• 4,000 lbs.
MACHINE DIMENSIONS	• 100: 130"W x 135"L x 120 1/8"H • 150: 130"W x 165 1/2"L x 120"H • 200: 130"W x 147 3/4"L x 119"H	• 126"W x 150"L x 118 5/16"H
APPROXIMATE SHIPPING WEIGHT	• 100: 2,300 lbs. • 150: 2,500 lbs. • 200: 2,800 lbs.	• 4,000 lbs.
ELECTRICAL REQUIREMENTS	• 100: 120V/1/60 15A ** • 150: 120V/1/60 15A ** • 200: 230V/3/60 15A **	• 230V/3/60 15A
PNEUMATIC REQUIREMENTS	• No external air source required; air compressor included	• 3 CFM @ 80 PSI comes with FRL (Filter, Regulator, Lubricator)
CONTROLS	• NEMA 4/12 control cabinet with quick disconnect • Separate up and down carriage speeds • Separate top and bottom wrap selectors (0-9) • Top cover pause switch • Spiral up/down • Flexibility of wrapping patterns • Manual carriage up/down switch	• NEMA 12 control cabinet with quick disconnect • Separate up and down carriage speeds • Separate top and bottom wrap selectors (0-9) • Intuitive alarm diagnostics • 0n-screen wrapping performance analysis • 0n-screen maintenance program and instructions
FILM DELIVERY SYSTEM	• 20" NO-THREAD® powered pre-stretch carriage • 1/2 HP AC motor with variable frequency drive for corner compensation	• 20" NO-THREAD® powered pre-stretch carriage • 1/2 HP AC motor with variable frequency drive for corner compensation
FILM TAIL TREATMENT	• Pulsed-controlled cutter • Film alignment arm and brush on film treatment • Air compressor included	• Pulsed-controlled cutter • Film alignment arm and brush on film treatment
ROTARY ARM DRIVE	• 1 HP AC motor with variable frequency drive • 25" ring gear bearing drive/support • 12 RPM variable speed	• 1 HP AC motor with variable frequency drive • 25" ring gear bearing drive/support • 17 RPM variable speed
STRUCTURE	• Heavy-duty structural steel construction	• Heavy-duty structural steel construction
WARRANTY	• 3-year unlimited cycle warranty • 10-year warranty on 25" ring gear bearings • Lifetime warranty on blue pre-stretch compound rollers	• 3-year unlimited cycle warranty • 10-year warranty on 25" ring gear bearings • Lifetime warranty on blue pre-stretch compound rollers

** (Other voltages available upon request)

Note: All machine specifications are subject to change without prior notice. All models featured require safety fencing. Nominal dimensions shown. *Production rate based on load size and configuration.



209 Wulftec, Ayer's Cliff, Quebec, Canada J0B 1C0
Tel.: (819) 838-4232 Toll Free: 1-877-WULFTEC (985-3832)
Fax: (819) 838-5539 E-mail: wulftec@wulftec.com

© Wulftec-M.J. Maillis Group 2003 • Printed in Canada

NON-CONVEYORIZED ROTARY ARM MODELS

ALL THE BENEFITS OF AUTOMATION
AT AN AFFORDABLE PRICE


WRTA-150/WRTA-200

FLOOR-MOUNTED MODEL HEAVY-DUTY, SELF-SUPPORTING FOUR-LEGGED MODEL



WRTA-150

- Pneumatically-activated Cut & Wipe Film Treatment System eliminates the need to attach and cut film—guaranteeing a tight wrap with no film tail
- Air compressor included—no external air source required
- 20" NO-THREAD® powered pre-stretch carriage
- 25" ring gear bearing drive
- Rotary arm speed up to 12 RPM WRTA-200: optional 17 RPM
- Unlimited load weight capacity
- Up to 60 loads per hour

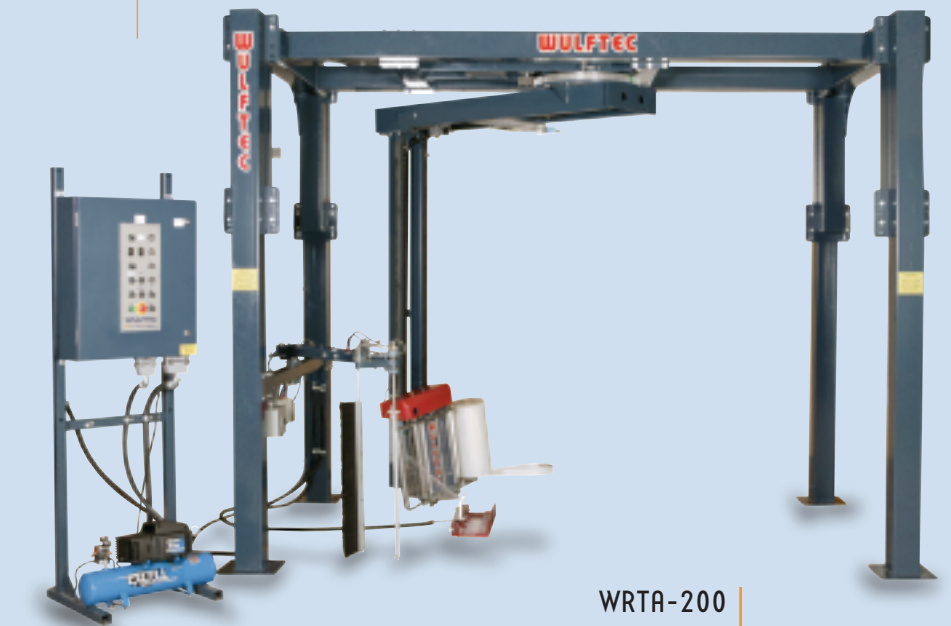


WRTA-200

ALSO AVAILABLE:
WRTA-100
COLUMN-MOUNTED MODEL

CONVEYORIZED ROTARY ARM MODEL

WCRT-200

THIS HIGH-SPEED MODEL CAN KEEP UP WITH EVEN THE MOST DEMANDING PRODUCTION RATES

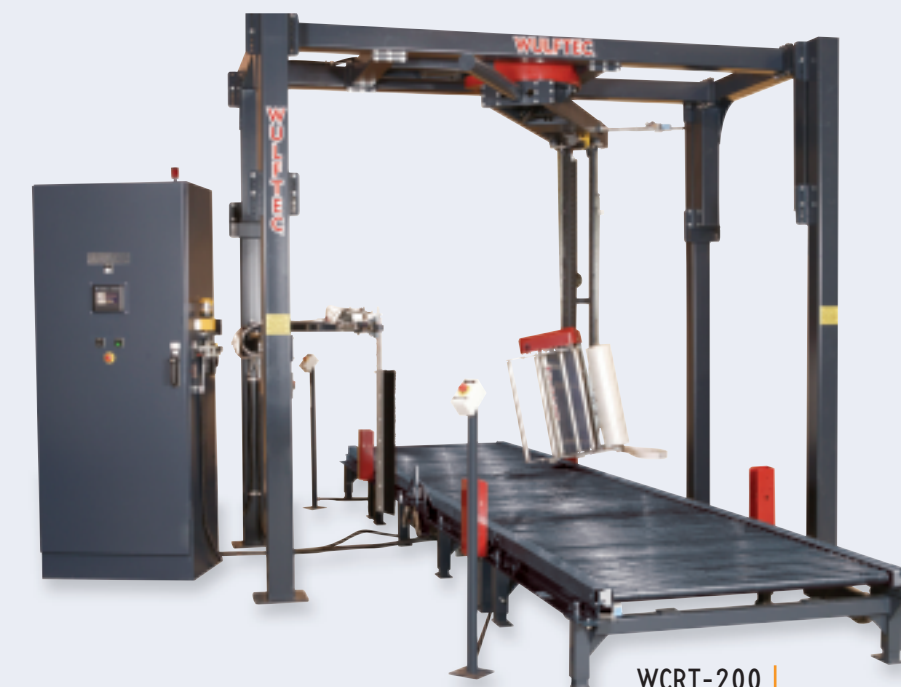

WCRT-200

- Optional elevating clamp for banding, separate double stack and one-way wrapping mode
- Counterweight for unstable load wrapping capability
- Easy access to all components for trouble-free maintenance
- 20" NO-THREAD® powered pre-stretch carriage
- 25" ring gear bearing drive
- Rotary arm speed up to 17 RPM
- 4,000 lbs. load weight capacity
- Up to 65 loads per hour

FOR MORE INFORMATION

ON OUR AUTOMATIC

STRETCHWRAPPERS, CALL

1-877-WULFTEC
(985-3832)

OR VISIT

WWW.WULFTEC.COM